


Safety & Installation Instructions

v1.2-12.23

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
6. a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. Electrical connection: this light fitting must be earthed. Make connections following the diagram below using the terminal block provided. A small flat-head screwdriver is required.

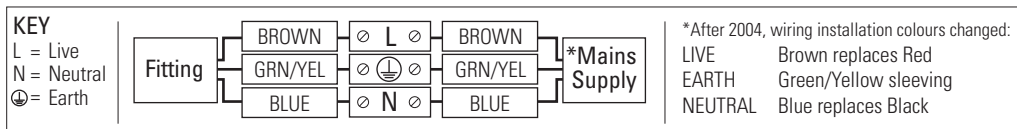

9. Double check all the connections are secure and that no loose strands of wire are left out of the connector. Ensure the lid of the terminal block is closed securely after making the connections.
10. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the Installation diagram inside.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the external flexible cord or cable of this luminaire is damaged, it shall exclusively be replaced by the manufacturer or his service agent, or a similar qualified person, in order to avoid a hazard. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning & Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft damp cloth with a diluted mild glass cleaner if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxfordshire from high quality components, produced in the UK.


ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Glass Pendants

DP8165/DP8164/DP8200-S/DP8200-M


Instruction Manual

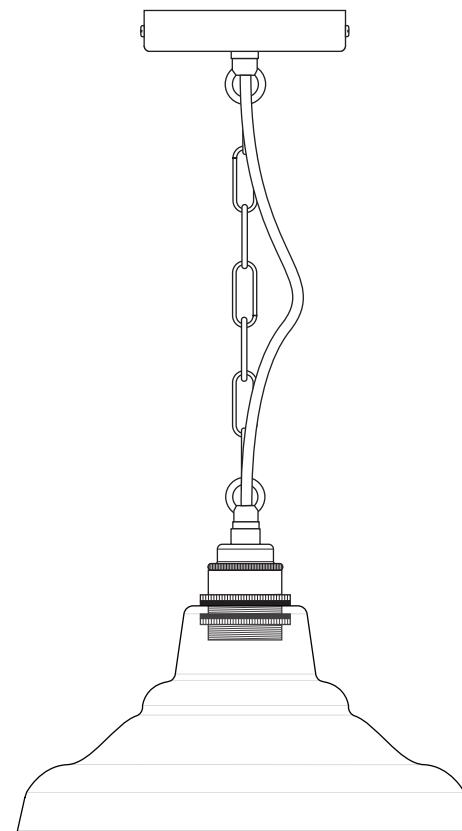

School Pendant, Size 1
DP8200/S




School Pendant, Size 2
DP8200/M



York Pendant, Size 1
DP8165



York Pendant, Size 1
DP8164





ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON • NEW YORK • PARIS



Glass Pendants DP8165/DP8164/DP8200-S/DP8200-M


| 230V AC 50Hz | IP20

DP8165 York Pendant, Size 1 DP8200/S School Pendant, Size 1
 DP8164 York Pendant, Size 2 DP8200/M School Pendant, Size 2

LAMP GUIDANCE			
BASE	SHAPE	TYPE*	WATTAGE**
E27	  GLS BALL	INCANDESCENT ✓	60W MAX
		CFL ✓	15W
		ECO-HALOGEN ✓	42W
		LED ✓	10W

* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Contents

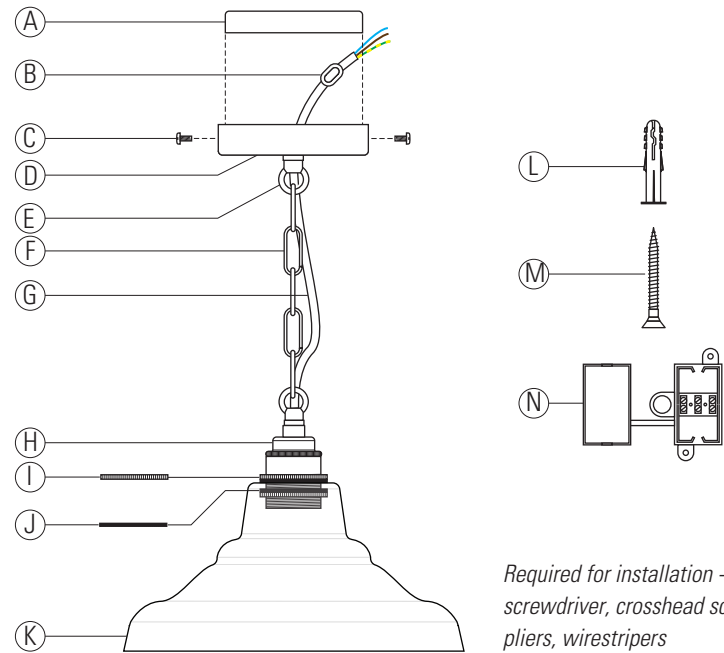


Contents

- A - Ceiling fixing plate
 - B - Cord grip
 - C - Ceiling rose screw (x2)
 - D - Ceiling rose
 - E - Loop
 - F - Chain
 - G - Cable
 - H - Lampholder
 - I - Shade ring (x2)
 - J - Gasket (*)
 - K - Shade
 - L - Rawl plug (x2)
 - M - Fixing screw (x2)
 - N - Terminal block
- * x1 DP8200/M, x2 others

Required for installation - Flathead screwdriver, small flathead screwdriver, crosshead screwdriver, drill (if holes are required), pliers, wirestrippers


Supply Cable Preparation

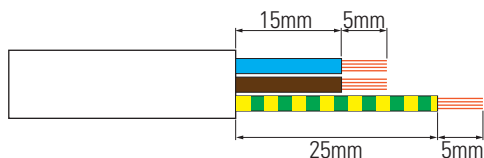

Please prepare the supply cable as shown. Note the maximum conductor size 1.5mm².


PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation Diagram & Instructions

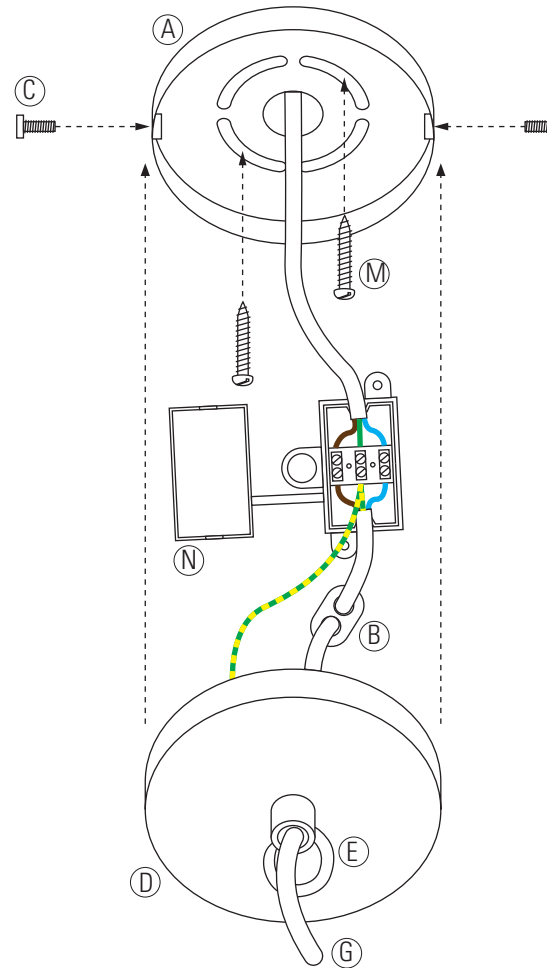

- STEP 1** - Read all the instructions, including those on the back page, before starting work. We recommend this installation is performed by a qualified electrician.
- STEP 2** - Mark & drill suitable fixing holes, referring to points 1 to 6 on the back page.
- STEP 3** - Secure the fixing plate (A) to the ceiling, using the screws (M) provided, and rawl plugs or other suitable means as described in point 6 on the back page.
- STEP 4** - Determine the desired drop of the luminaire, before shortening the chain as desired. You can use pliers to open & close the chain links.
- STEP 5** - Shorten the cable (G) as desired, taking into consideration that the chain is designed to support the weight of the pendant, so the cable must be longer. Allow sufficient slack (around 10cm) to connect the terminal block (N).
- STEP 6** - Feed the cable through the ceiling rose (D), before securing it with the cord grip (B).
- STEP 7** - Make the connections to the main supply, using the terminal block (N) provided. Refer to points 7 to 9 on the back page.
- STEP 8** - Secure the ceiling rose (D) to the fixing plate (A) using the ceiling rose screws (C).

DP8200/M Shade Suspension

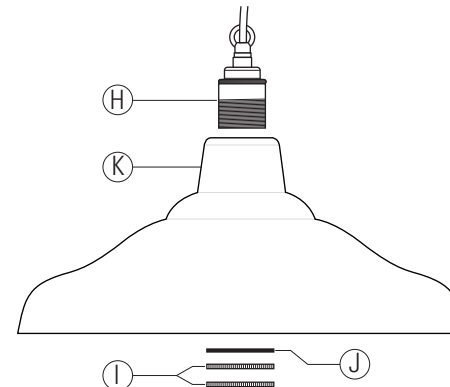

While the shades for DP8200/S, DP8165 & DP8164 are supplied attached, the shade for DP8200/M must be hung during installation. Feed the lampholder (H) through the shade (K), before inserting the gasket (J) over the threaded skirt of the lampholder and screwing on the two shade rings (I). The gasket will rest against the glass shade. You can gently adjust the shade to ensure it hangs straight. All shades are tested in this manner prior to dispatch.