


These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
6.
 - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
 - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
 - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. Electrical connection: this light fitting must be earthed. Make connections following the diagram below using the terminal block provided. A small flat-head screwdriver is required.

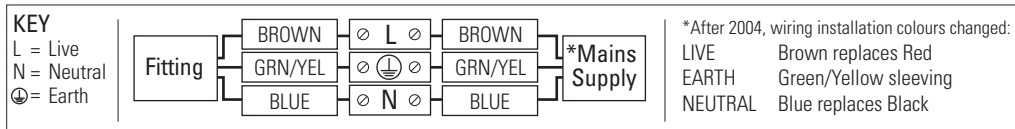

9. To maintain the IP rating of this fitting, you must ensure that the electrical connection has suitable protection from water ingress, housing the connection in an IP rated junction box or sealing the backplate with silicone.
10. Ensure that all electrical connections are tight, with no loose strands of wire left out of the connectors. Ensure the lid of the connector is closed securely and that no wires are trapped behind or within the fitting. Complete the installation by screwing the fitting to the mounting surface.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information


Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced.

Cleaning and Maintenance


Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) or suitable glass cleaner if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.


ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND

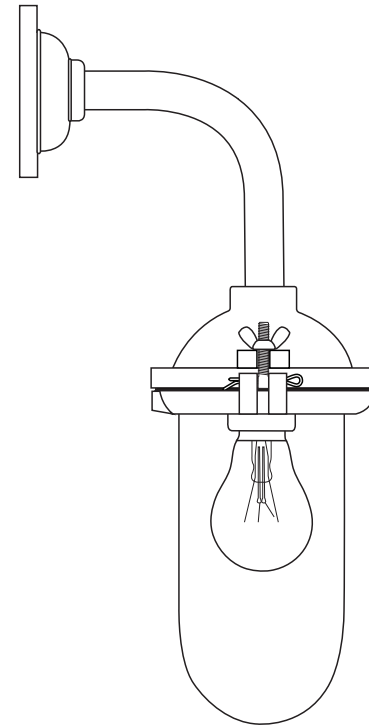


Exterior Bracket Light
DP7684




Exterior Bracket Light,
Canted Arm
DP7684



Exterior Bracket Light
DP7685








Exterior Bracket Light,
Canted Arm
DP7685





Exterior Bracket Light 7684 / 7685 | 230V ac 50Hz | IP54

DP7684 Exterior Bracket Light DP7684/C Exterior Bracket Light Canted Arm
 DP7685 Exterior Bracket Light DP7685/C Exterior Bracket Light Canted Arm


An exterior bracket light with a heavy cast reflector, which is retained by brass wing nuts and bolts for easier access to the lamp. Available in either galvanised cast iron or sandblasted bronze finish and with a canted or right angle arm. Glass is clear or frosted.

LAMP GUIDANCE			
BASE	SHAPE	TYPE*	WATTAGE**
 E27	 GLS	INCANDESCENT ✓	60W MAX
 BALL	 CFL	✓	15W
	 LED	✓	28W
		✓	12W


* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

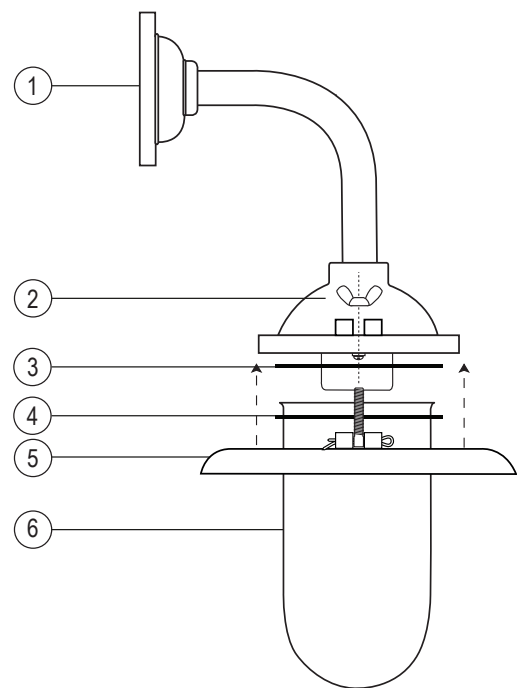

Wide gasket



Narrow gasket



Contents


- 1 - Backplate/Arm/Pan assembly
- 2 - Wingnut*
- 3 - Wide Gasket
- 4 - Narrow Gasket
- 5 - Ring (7684)/Reflector (7485) and swing bolt
- 6 - Well Glass
- 7 - 2 x Fixing screws
- 8 - 2 x Rawl plugs
- 9 - Connector

Required for Installation

- Screwdriver, flat-head
- Small screwdriver, flat-head
- Drill (if holes are required)

*Wingnuts secure pan/reflector and well glass in place. Loosen to allow removal of the pan/reflector and glass when re-lamping.

Installation Diagram

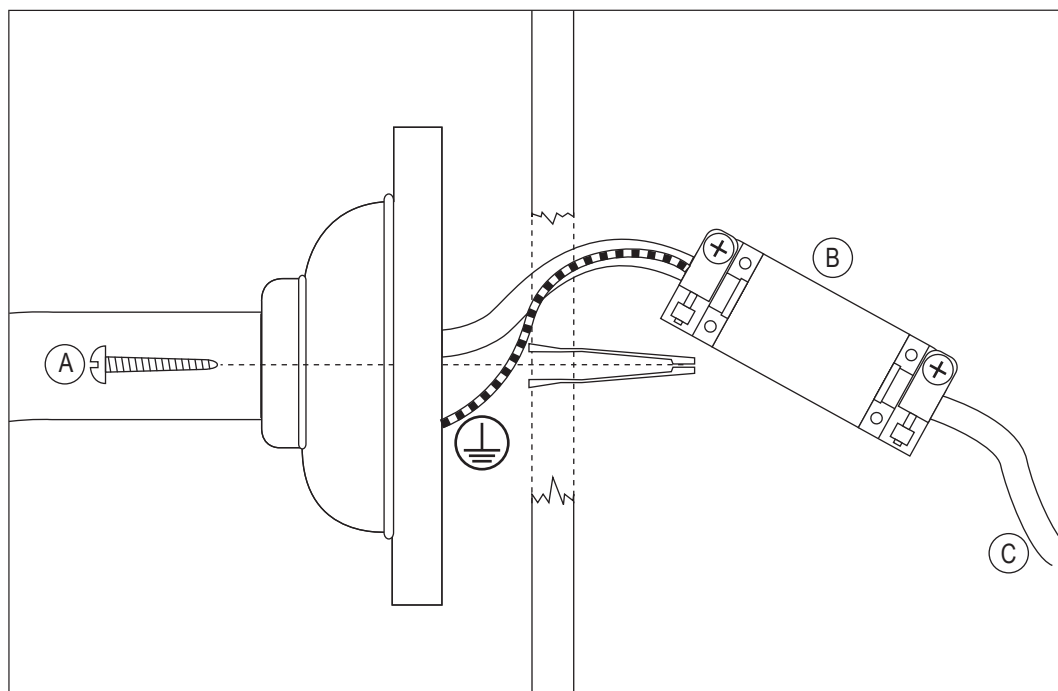

Key

- A Fixing Screw
- B Connector Block
- C Main Supply

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation and Assembly Instructions

Install light as described overleaf and then assemble the rest of the light, following the diagram on the opposite page.

- Ensure the wide gasket (the one with the smaller inner hole) fits into the top of the pan (next to lampholder).
- Ensure the narrow gasket is positioned under the lip of the glass (and above reflector/ring).
- Having inserted a light bulb, position the glass in the pan and then secure in place by attaching the ring/reflector to the pan by fitting the wing nuts to the swing bolts through the pan. DO NOT OVER TIGHTEN.

If the light is to be installed in an exterior location, it is advised that a thin bead of sealant is applied around the back plate to prevent water damage.